



AQUATEX

HIGH PERFORMANCE WEATHERSEALS FOR WINDOWS AND DOORS

Aquatex A15
Seals gaps 9-15mm

Classification + Performance
BS 12365-12003 Classification W72560
2.1m Lengths, 125L/Box
Ref:1.27.065 White + Brown +Black

Aquatex A13
Seals gaps 5.5-12mm

Classification + Performance
BS 12365-12003 Classification W62560
350m/Box (2x175m)
Ref:1.28.700 White + Brown +Black

Aquatex A10
Seals gaps 4.5-8mm

Classification + Performance
BS 12365-12003 Classification W32560
500m/Box (2x250m)
Ref:1.27.021 White + Brown + Black

Aquatex A9
Seals gaps 6-11.5mm

Classification + Performance
BS 12365-12003 Classification W52560
400m/Box (2x200m)
Ref:1.27.569 White + Brown + Black

Aquatex A5
Seals gaps 4-8.5mm

Classification + Performance
BS 12365-12003 Classification W43560
600m/Box (2x300m)
Ref:1.27.562 White + Brown +Black

Aquatex P10
Seals gaps 3.5-5.5mm

Classification + Performance
BS 12365-12003 Classification W45560
500m/Box (2x250m)
Ref:1.27.484 White + Brown + Black

Aquatex P11
Seals gaps 4.5-6mm

Classification + Performance
BS 12365-12003 Classification W35560
500m/Box (2x250m)
Ref:1.27.109 White + Brown + Black

Aquatex P8
Seals gaps 2-3.5mm

Classification + Performance
BS 12365-12003 Classification W15560
700m/Box (2x350m)
Ref:1.27.048 White + Brown +Black


Aquatex P6
Seals gaps 4-6mm

Classification + Performance
BS 12365-12003 Classification W23560
600m/Box (2x300m)
Ref:1.27.063 White + Brown +Black

LIFE TIME GUARANTEE

Aquatex S20

Seals gaps 5-7.5mm

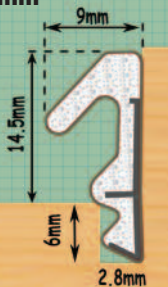

Classification + Performance


BS 12365-12003 Classification W43560

250m/Box (2x125m)

Ref:1.27.124 White + Brown + Black

Aquatex S21

Seals gaps 5-8mm

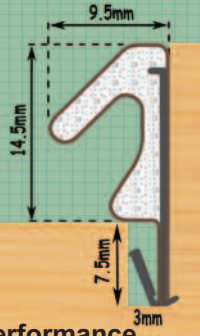

Classification + Performance

BS 12365-12003 Classification W33560

300m/Box (2x150m)

Ref:1.28.091 White + Brown +Black

Aquatex S25

Seals gaps 5-6.5mm



Classification + Performance

BS 12365-12003 Classification W34560

200m/Box (2x100m)

Ref:1.28.097 White + Brown

Aquatex D Slot

4.8mm x 5.0mm
Seals gaps 3.5-4.8mm



Classification + Performance

BS 12365-12003 Classification W14560

1220m/Box (2x610m)

Ref:1.28.069 White + Brown +Black

Aquatex D Slot

4.8mm x 6.5mm
Seals gaps 4.5-6mm



Classification + Performance

BS 12365-12003 Classification W24560

900m/Box (2x450m)

Ref:1.28.070 White + Brown +Black

Aquatex D Slot

4.8mm x 7.5mm
Seals gaps 5.5-7mm



Classification + Performance

BS 12365-12003 Classification W23560

600m/Box (2x300m)

Ref:1.28.071 White + Brown +Black

Aquatex D Slot

4.8mm x 9.5mm
Seals gaps 6.5-6.9mm



Classification + Performance


BS 12365-12003 Classification W24560

600m/Box (2x300m)

Ref:1.28.072 White + Brown

POLYETHYLENE OUTER SKIN

POLYURETHANE FOAM CORE

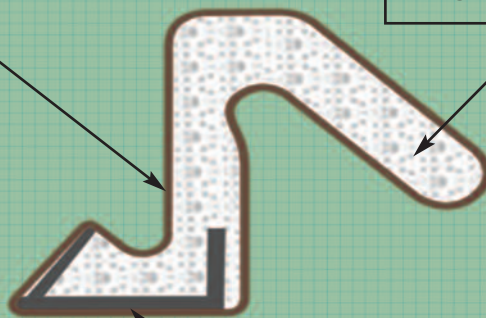

POLYPROPYLENE INSERT

Aquatex Features

- P.U. foam core provides excellent recovery after long-term deflection.
- Working temperature range -40°C to +70°C.
- Thicker polyethylene outer sheathing improves resistance to wear and tear.
- Deflection ranges to cope with tolerance and seasonal movement of seal gap.
- Excellent UV stability.
- Outer skin not affected by paints and stains.
- Aquatex does not propagate mould growth or mildew.
- Standard colours. Brown, White, Black.

Key Performances

Temperature Range. -40°C to +70°C.
Compression Set. < 15%.
Uv Stability. 5000 hrs QUV tester. UVB 313 bulb. (4hrs light 4hrs dark cycle)

Materials

Outer skin. Polyethylene. (Properties include: inert, low friction, Uv stable, colour options)
Foam Core. Polyurethane. (Properties include: excellent memory over extended temp range)
Inserts. Polypropylene (Properties include: longitudinal stability and secure fixing)